

**StarBoard *Link EZ2***

**Modular Interactive Whiteboard System**



**Transforms your dry erase board into a fully functioning interactive whiteboard!**

Save money, space and time! StarBoard Link EZ2 turns your dry erase whiteboard into an interactive whiteboard and converts already acquired equipment (projectors, dry erase boards) into an engaging interactive environment.

Attach the system to any flat surface, connect it to a computer, connect the computer to a projector, a quick set-up routine and you are ready to start using a fully functioning IWB.



**Easy installation**

StarBoard Link EZ2 secures to any flat surface in minutes to transform a static wall into an interactive environment.



**Finger-driven technology**

Use your finger, stylus or any object to easily navigate through activities, websites, and multi-media content.



**Resizable input area**


The size of active area is adjustable - from 60" if the surface is limited, to 90" for the rooms where a bigger size of projection and work space is required.



**Control using multi-touch gestures**

Use your finger to annotate, fist to scroll and two fingers to erase or zoom in and out.

# StarBoard Link EZ2

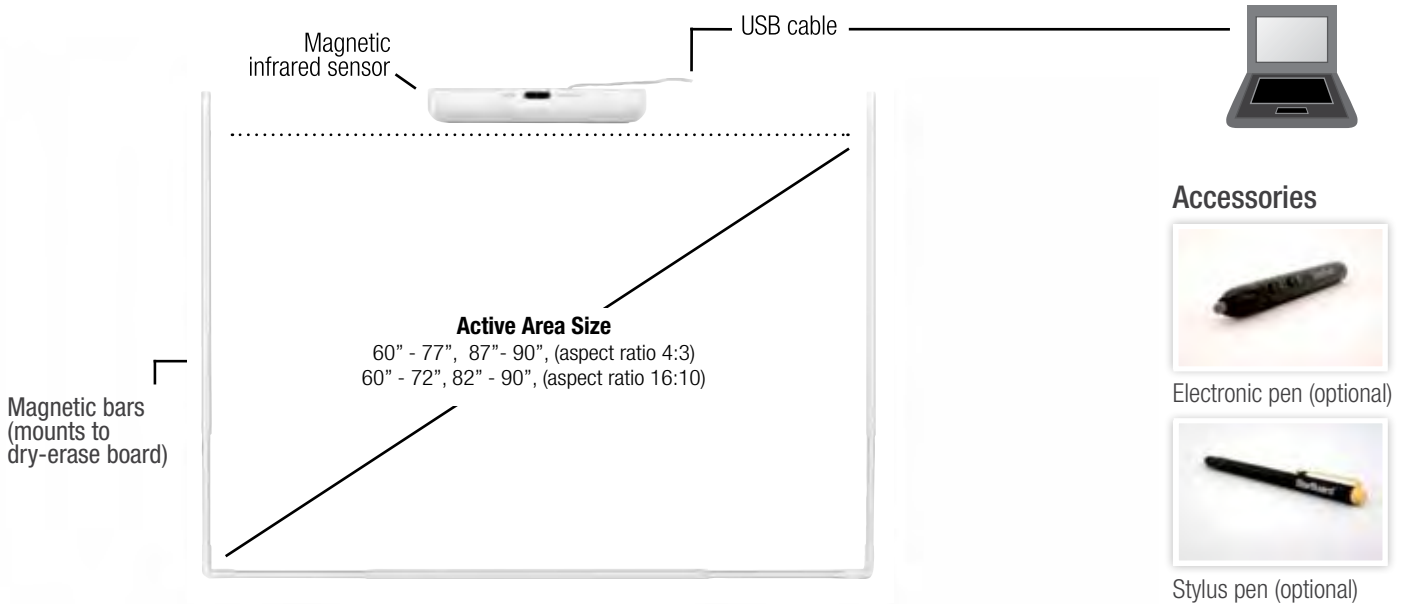

## Accessories



Electronic pen (optional)



Stylus pen (optional)



## StarBoard software is included with every purchase of StarBoard Link EZ2

- Support of different OS: Windows, Mac, Linux;
- Customisable floating toolbar;
- Hand writing recognition;
- Direct access to the Internet, Google image search;
- Import Microsoft Office files (Word, PPT...);
- Supports IWB Common File Format (CFF) for easy sharing of educational content;
- Remote conferencing feature.

## Product Specifications (preliminary)

### Hardware Specification

**Model Name**  
StarBoard Link EZ2

**Digitising Technology**  
Infrared Image Sensor System

**Interface to Computer**  
USB 1.1, 2.0 (cable length: 6.0 m)

**Active Area Size**  
60» - 77», 87» - 90» (4:3)  
60» - 72», 82 - 90» (16:10)

**Coordinate Resolution**  
Approx. 0.05 mm

**Tracking Speed**  
Approx. 100 points/sec

**Digitiser Dimensions**  
510 × 75.5 × 41 mm  
20.1 × 3.0 × 1.6 inches

**Reflective Bars Dimensions**  
826 - 1480 × 24 × 21 mm  
32.5 - 58.3 × 0.9 × 0.8 inches

**Weight**  
Approx. 1.5 kg (3.3 lbs)

**Operating Specification**  
+5 - +35 °C (41 - 95 °F), 20-80% humidity, without condensation

**Storage Specification**  
-10 - +45 °C (14-113 °F), 20-80% humidity, without condensation

**Product Configuration**  
Digitiser, USB extension cable, Cable holder, Reflective bars, Corner piece, Joint piece, Screws, Wall mount bracket, Magnet spacer, Starboard Software DVD-ROM, StarBoard Software Startup Guide, StarBoard Link EZ2 Startup Guide.

**Certificates**  
VCCI Class A, FCC Class B, CE

**Software Requirements\***  
\* Based on StarBoard Software 9.3

**PC Requirements**  
OS: MS Windows XP (32 bit) / Vista / 7 (32/64bit), latest service pack must be applied (Tablet PC and Server Edition are currently not supported);  
CPU: Intel Pentium 4 1.8GHz or higher;  
RAM: 1 GB or more is recommended;  
HDD: 600 MB of free space;  
Display Color Depth: 16bit or more.

**Mac Requirements**  
OS: Mac X 10.5 / 10.6;  
CPU: IntelR processor;  
RAM: 1 GB or more is recommended;  
HDD: 600 MB of free space;  
Display Color Depth: 16bit or more.

**Linux Requirements**  
OS: Ubuntu 9.04 (linux-kernel-2.6.28-19-generic), Ubuntu 10.04 (linux-kernel-2.6.32-30-generic), openSUSE 11.1 (linux-kernel-2.6.27.56-0.1-default), Debian GNU/Linux 5.0 (linux-kernel-2.6.26-2), (Only 32bit version is supported);  
CPU: Intel Core2 Duo 2.4GHz;  
RAM: 1 GB or more;  
HDD: 500 MB of free space;  
Display Color Depth: 16bit or more.

## Hitachi Australia Pty Ltd

Level 8, 123 Epping Road, North Ryde NSW 2113  
Tel: +61 2 9888 4100 1800-HITACHI (Australia only)  
Fax: +61 2 9888 4188 Email: dps@hitachi.com.au  
www.hitachi.com.au www.hitachistarboard.com.au

Authorized distributor / reseller



# StarBoard