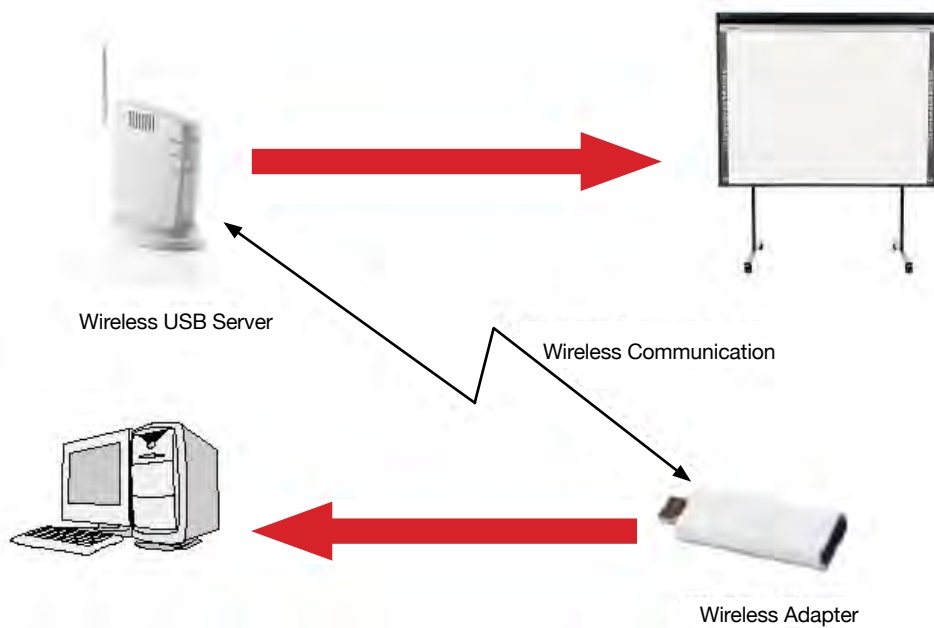# Wireless Connectivity for FX–Duo Interactivity

The new Silex Hi-speed USB Wireless Server – enhancing the Hitachi FX-Duo experience

Wireless USB Server

Wireless Communication

Wireless Adapter

Wireless connectivity now extends to the interactive whiteboard arena with the new Wireless Connection option from Hitachi. Overcoming the 5 metre length restriction for USB connections, the Wireless USB server connects directly to the FX-DUO Board using the whiteboard's existing USB lead.

A separate Wireless adaptor connects to the controlling Computer's USB port which will then establish two-way communication to the board via the Wireless Server providing an instant wireless connection between the computer and the whiteboard.

HITACHI
Inspire the Next

The New Wireless - G USB 2.0

Keychain Adaptor with Auto Installation.

- Auto Installation for Windows – No Driver's CD Needed

- Easy Setup with AirStation One – Touch Secure Systems

- Supports WPA-PSK (TKIP, AES). 802.1x, and 128/64-bit WEP Security

- Small, Compact Design

- USB 2.0 / 1.1

- Bus Powered – No A/C Adaptor Needed

- Communication Range: 54Mbps Speed – Indoor 50m

Hi - Speed USB

Product name	Silex SX-2000WG
Supported Operating Systems	Windows2000/XP/ Vista/Mac OS X
Supported protocols	TCP/IP
Printer Interface	USB 2.0 High-Speed (A-Type) x1
Network Interface	IEEE802.11b/gm Wireless
Configuration	Web Browser Quick setup
Languages (installation utility)	English, German, French, Italian, Spanish, Portuguese, Chinese, Japanese
Power Supply	Universal AC Adaptor (AC100 - 240V)
Power consumption	9W (DC5V 1.8A)
Warranty	2 years
Regulatory approvals	FCC, CE, VCCI Class B
Package contains	SX-2000WG, Setup Guide, AC Adaptor, Warranty booklet, CD-ROM with configuration utilities and manuals, Antenna, Stand
Dimensions	36 x 140 x 143 mm (excl. Antenna & Stand) 1.4 x 4.5 x 5.4 in (excl. Antenna & Stand)
Weight	172g / 5.6 oz (excl. Antenna & Stand)

HITACHI
Inspire the Next